

A/600

Micro g Piezoelectric Accelerometer

1.2 nC/g nom. 114.5gm 250°C max. temp




Ultra high output, multiple shear plate vibration transducer. Shear plate construction provides near total isolation from mechanical inputs other than acceleration, thus safe guarding measurement integrity in applications where vibration is accompanied by high dynamic strain levels. Generalizing, these conditions are prevalent where modal frequencies are low, and are thus associated with vibration surveys of large structures. Transducers exhibiting significant strain response may operate more akin to strain gauges at low frequency excitation and their use is to be discouraged.


A number of parallel shear plates equivalent in total thickness to single plate of charge sensitivity Q and capacitance C , generates charge nQ . Clearly taken to the limit, noise degradation overrides signal increase, hence these products are largely a compromise between signal/noise and mass/size.

Options: A/600 – side entry connector : A/600/T – top entry connector

Typical Frequency Response

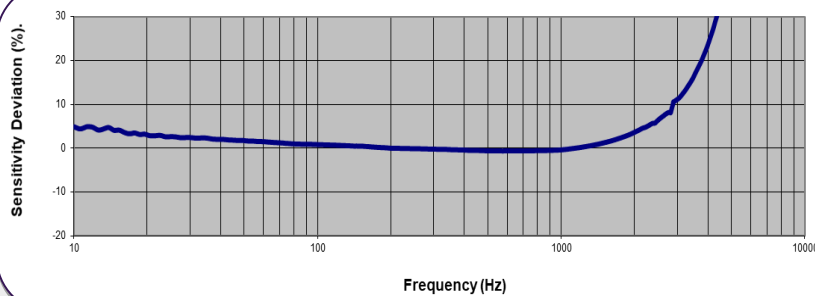


A/600



	Metric	Imperial
Charge Sensitivity nom.	0.12nC/(m/s ²)	1.2nC/q(m/s ²)
Resonant frequency	8 kHz	
Typical Frequency Response	±5% 0.5Hz – 1kHz ±10% 0.3Hz – 2kHz	
Cross axis error	≤5%	
Capacitance nom.	7.5 nF	
Temperature range	-50/+250°C	-58/+482°F
Charge Sensitivity Deviation (20°C / 68°F)	-5% @ -50°C +15% @ +250°C	-5% @ -58°F +15% @ +482°F
Base strain sensitivity	0.0001g/μ strain	
Pyro-electric output	0.2 q/°C	
Pyro-electric corner frequency	0.001 Hz	
Max continuous accn. g sine	6865m/s ²	700g
Case material	s/steel 303 S31	
Mounting	Base tapped 10/32 UNF x 4mm deep	Base tapped 10/32 UNF x 0.16in deep
Weight	114.5gm	4.03oz
Case seal	Welded	
Size	28(AF) x 28mm	1.10(AF) x 1.10in
Connector	Side entry 10-32 UNF Microdot	

Temperature Response

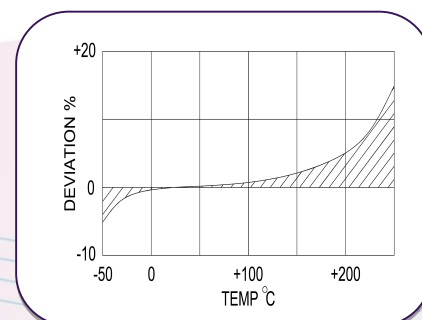

peak 
DISTRIBUTOR

t: 616-773-2872
e: sales@peak-g.com

Please note: For information and reference only. Data should not be used as pass / fail criteria for calibration purposes.

DJB Instruments (UK) Ltd
Finchley Avenue,
Mildenhall, Suffolk IP28 7BG

Tel +44 (0)1638 712 288
Email sales@djbinstruments.com
Web www.djbinstruments.com

DJB Iss.4 2020

A UK company with UK-based manufacturing, assembly and calibration in-house.



ISO 9001 – 00025363